




● LZB-S短管型



● 技术参数

公称口径 DN(mm)	型号	测量范围 水,20℃			允许被测 流体状况
		m ³ /h	LPM	GPM	
25	LZB-25S	0.1-1	1.6-16	0.4-4	精确度等级: 4级 耐压: <0.6Mpa 介质温度 0~60℃
		0.16-1.6	2.5-25	0.7-7	
		0.25-2.5	4-40	1.0-10	
32	LZB-32S	0.4-4	6-60	1.6-16	
		0.6-6	10-100	2.5-25	
50	LZB-50S	1-10	16-160	4-40	
		1.6-16	25-250	7-70	
60	LZB-65S	5-25	40-400	10-100	
		6-40	65-650	15-150	
		12-60	120-650	30-170	
			20-1000	50-260	

● 结构示意图

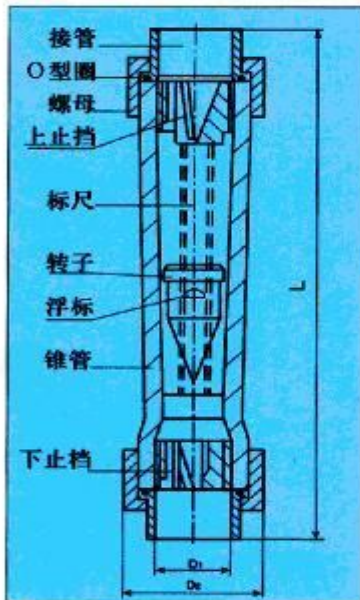

● 外形及安装尺寸

公称口径 DN(mm)	型号	L	D ₁		D ₂
			接插连接	管螺纹连接	
25	LZB-25S	226	ø32	G3/4"	ø60
32	LZB-32S	288	ø40	G1"	ø74
50	LZB-50S	341	ø63	G1 1/2"	ø98
65	LZB-65S	430	ø75	G2"	ø122

注：连接方式有接插连接和管螺纹连接二种，结构示意图以接插连接为例。




LZB 法兰流量计 LZB flange flowmeter

通径 DN (mm)	型号 Type	测量范围(m ³ /h)		连接高度(mm)		允许被测液体状况 Condition of liquid to be measured
		L/min	Gallon/min	法兰型 Flange type	丝口型 Thread type	
100 法兰 flange	LZB100S	8-50		555		准确度等级: 4级 耐压: < 1MPa 介质温度: 0℃-60℃ Grade of accuracy: 4th grade Withstanding Pressure: < 1MPa Temperature of medium: 0℃-60℃
		14-90				
		16-120				
125 法兰 flange	LZB125S	25-150		555		准确度等级: 4级 耐压: < 1MPa 介质温度: 0℃-60℃ Grade of accuracy: 4th grade Withstanding Pressure: < 1MPa Temperature of medium: 0℃-60℃
		25-180				
		25-200				
150 法兰 flange	LZB150S	25-180		555		准确度等级: 4级 耐压: < 1MPa 介质温度: 0℃-60℃ Grade of accuracy: 4th grade Withstanding Pressure: < 1MPa Temperature of medium: 0℃-60℃
		25-180				
		25-200				


南京迪泰尔仪表机电设备有限公司

聚砜材质流量计耐强碱 Polysulfone flowmeter can resist strong alkali



通径 DN (mm)	型号 Type	测量范围		连接高度 mm		允许被测液体状况 Condition of liquid to be measured
		L/min	Gallon/min	法兰型 Flange type	丝口型 Thread type	
25	聚砜 25S Polysulfone	1-9	0.2-2.2	278	358	准确度等级: 4级 耐压: < 1MPa 介质温度: 0℃-100℃ Grade of accuracy: 4th grade Withstanding Pressure: < 1MPa Temperature of medium: 0℃-100℃
		2-18	0.5-5.0			
		2.5-26	0.7-7.0			
		4-40	1-10			
		7-70	2-18			
40	聚砜 40S Polysulfone	7-70	2-18	325	420	准确度等级: 4级 耐压: < 1MPa 介质温度: 0℃-100℃ Grade of accuracy: 4th grade Withstanding Pressure: < 1MPa Temperature of medium: 0℃-100℃
		10-100	2.5-25			
		15-170	5-45			
		25-260	7-70			
		30-340	10-90			


● LZB-S长管型

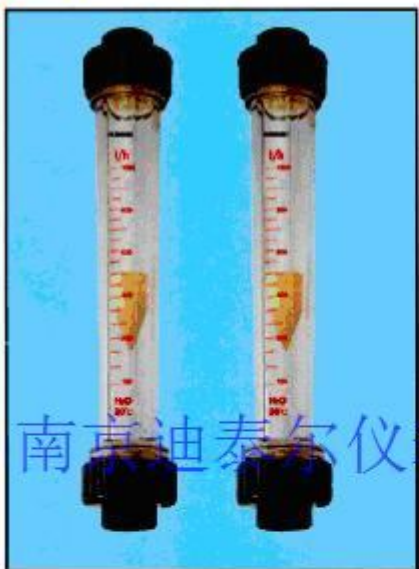

● 技术参数

公称通径 DN(mm)	型号	测量范围 水, 20°C	允许被测 流体状况
15	LZB-15S	10-100 L/h	精确度等级: 4级 耐压: ≤0.6Mpa 介质温度: 0~80°C
		16-160 L/h	
		25-250 L/h	
		40-400 L/h	
		60-600 L/h	
25	LZB-25S	100-1000 L/h	
		160-1600 L/h	
		250-2500 L/h	
		300-3000 L/h	
50	LZB-50S	0.4-4 m³/h	
		0.6-6 m³/h	
		1-10 m³/h	
		1.6-16 m³/h	

● 结构示意图

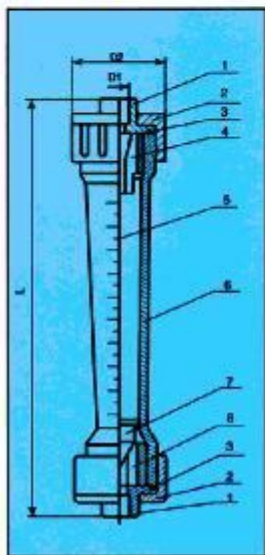

- 1、接管
- 2、螺帽
- 3、“O”密封圈
- 4、上止档
- 5、标度尺
- 6、锥管
- 7、浮子
- 8、下止档

● 外形及安装尺寸

(mm)

公称通径 DN(mm)	型号	L	D ₁		D ₂
			接插连接	管螺纹连接	
15	LZB-15S	280	ø20		ø45
25	LZB-25S	380	ø32	G3/4"	ø68
50	LZB-50S	435	ø63	G1 1/2"	ø98

注：连接方式有接插连接和管螺纹连接二种，结构示意图以接插连接为例。

LZS 型塑料管转子流量计主要部件均由 ABS 塑料制成，结构轻巧，锥管不易破碎具有较好耐腐蚀性能。广泛应用于化工环保食品等工业。SD 型为短管型。